




Anti Vandal Switch Ø25mm

Order Code

Series	Actuator Options	Terminal Options	Function Options	Material Options	Illumination Style Options	Led- Color Options	Illumination Voltage Options	Graphic Options
☐ ☐	☐	☐	☐	☐	☐	☐	☐ — ☐	☐ ☐ ☐
L25	F-Flat	NONE-Solder lug (2.8X0.5)	M-Momentary 1-1NO1NC 2-2NO2NC Z-Latching 1-1NO1NC 2-2NO2NC	S-Stainless steel A-Anodized aluminum*	NONE-Non-illum. D-Dot R-Ring	NONE-Non-illum. W-White Y-Yellow B-Blue G-Green R-Red O-Orange	NONE-Base voltage** 3.3V 6V 12V 24V 36V 110V 220V	NONE-Non-marking LE-Laser etched



Notes:
* Base voltage on LEDs:
1.8V @20mA for red, yellow and orange LED colors
2.8V @20mA for blue, green and white LED colors

Description

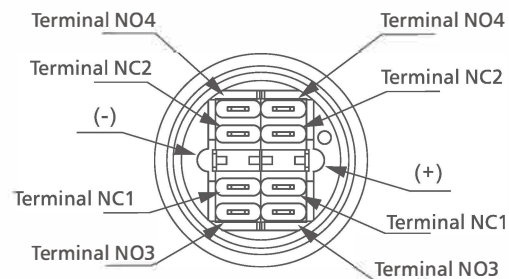

Terminals (-) and (+) used with illum.option only


Panel Cutout & Illuminated Options

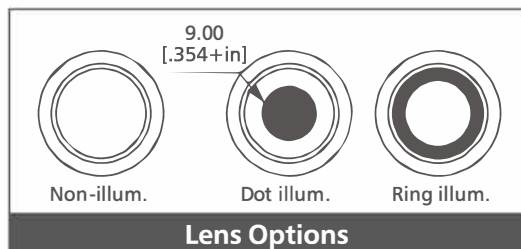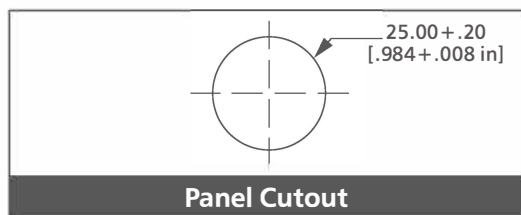




Technical Data

Type	L25-F
Illuminated options	Non-illuminated / Ring illuminated / Dot illuminated
Terminal	Solder lug (2.8X0.5)
Max. switch rating	Ith: 5A Ui: 250VAC
Contact resistance	≤ 50mΩ
Insulation resistance	≥ 1000mΩ
Dielectric strength	2000VAC
Operation temp.	-20°C ~ + 55°C
Mechanical life	1,000,000 cycles
Electrical life	> 50,000 cycles
Contact material	Silver alloy
Torque	5~14Nm
Operation pressure	Approx. 8N
Protection	IP65/ IK10
Material	
Actuator	Stainless steel / *Anodized aluminum
Body	Stainless steel / *Anodized aluminum
Base	PA
LED	
Color	3.3V / 6V / 12V / 24V / 36V / 110V / 220V R/G/Y/O/B/W Approx. 40,000 hours


Momentary

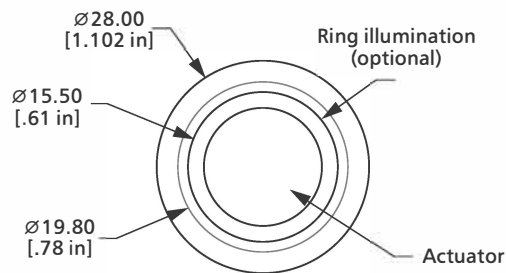

Panel thickness:
1-10mm for momentary
1-12mm for maintained


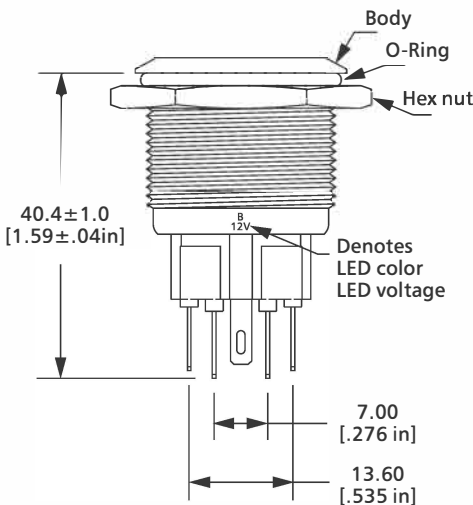
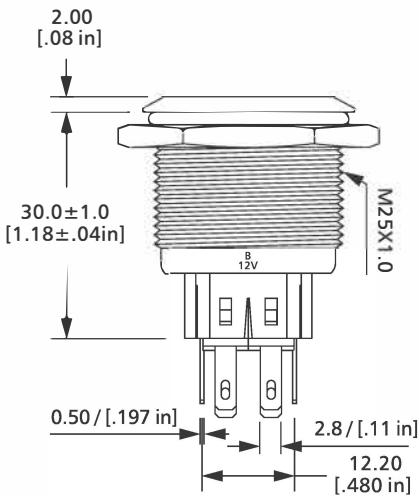


DPDT
2NO2NC ON (OFF) / OFF (ON)
Contact configuration
illuminated




SPST
1NO1NC ON (OFF) / OFF (ON)
Contact configuration
illuminated

Latching

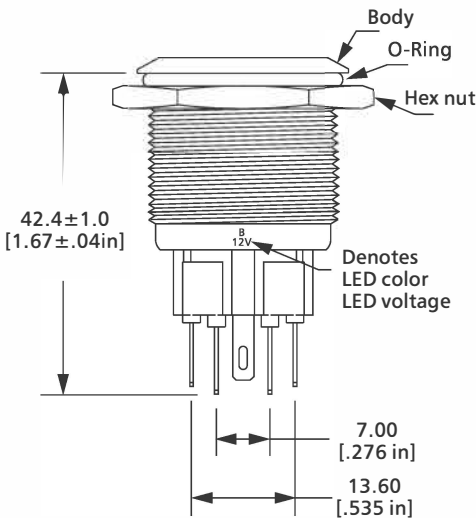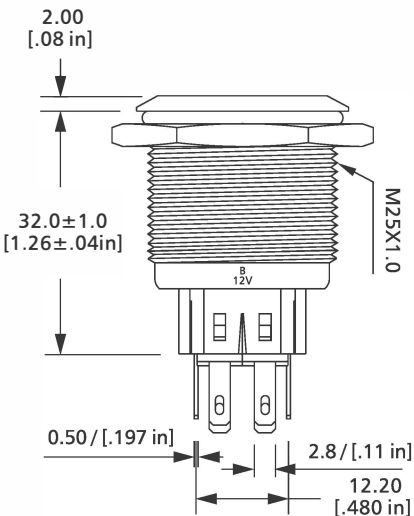

DPDT
2NO2NC ON (OFF) / OFF (ON)
Contact configuration
illuminated



SPST
1NO1NC ON (OFF) / OFF (ON)
Contact configuration
illuminated