

Ultra short anti vandal switch

Ø12/Ø16/Ø19/Ø22/Ø25mm

RoHS COMPLIANCE



Applications / Markets



Yacht Controls



Security Devices




Industrial Controls



Kiosks



Car Controls



Medical Equipment

SPECIFICATIONS

Electrical Rating: 50mA, 24VDC
Mechanical Life: 1,000,000 Cycles
Electrical Life: 50,000 Cycles
Contact Resistance: 100mΩ Max.
Insulation Resistance: 1000mΩ Max.
Dielectric Strength: 2,000VAC
Operating/Storage Temperature: -20°C to 55°C
Travel: 0.5mm
Moisture Protection: IP67
Actuation Force: 4N
Panel Thickness: 1-3mm
Mounting Nut Torque: 5-14Nm

FEATURES & BENEFITS

- 12, 16, 19, 22 or 25mm diameter panel cutout
- Variety LED option
- Multiple function options
- Ring illumination available
- IP67 rated




PART NUMBER CONFIGURATOR

Series	Actuator Options	Terminal Options	Function Options	Material Options	Illumination Style Options	LED-Color Options	Illumination Voltage Options	Graphic (Optional)
☐	☐	☐	☐	☐	☐	☐	☐	☐
L12U - 12mm L16U - 16mm L19U - 19mm L22U - 22mm L25U - 25mm	F - Flat	NONE Solder-lug (2.0x0.5) N - Screw Terminal (19mm only)	Momentary 1- NO	S - Stainless Steel	NONE - Non-Illuminated R - Ring Illumination	NONE - Non-Illuminated W - White R - Red O - Orange G - Green B - Blue Y - Yellow	NONE - Non-Illuminated 3.3V 6V 12V 24V	NONE - Non-Illuminated LE - Laser etched

Specifications subject to change without notice







Ultra short anti vandal switch
Ø12mm

SOLDER TERMINAL

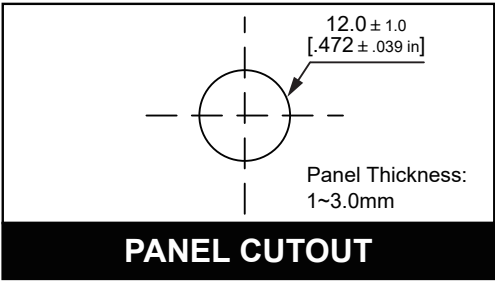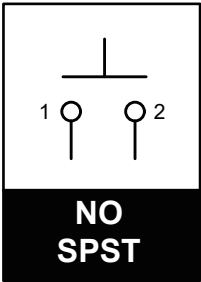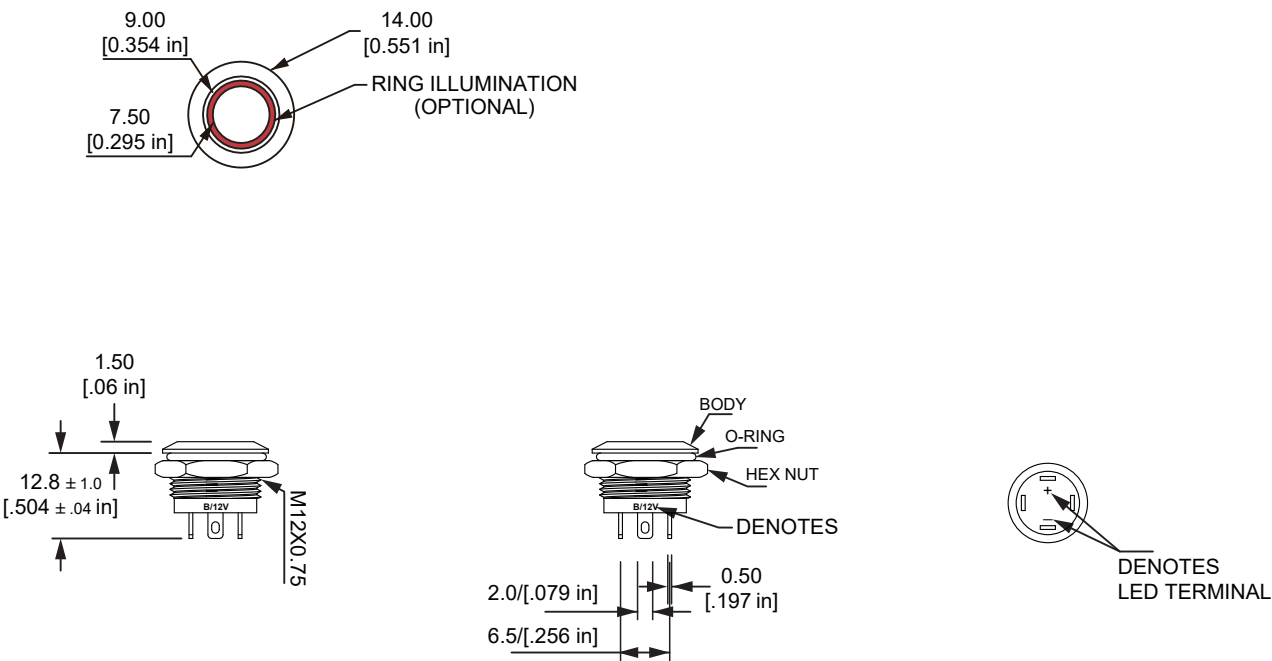

Ultra short anti vandal switch Ø16mm


DIMENSIONS

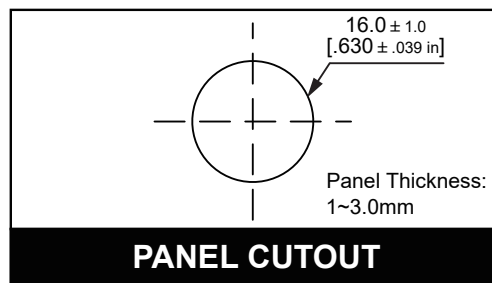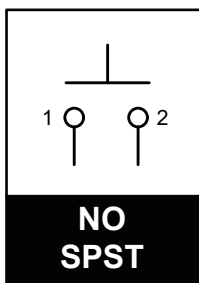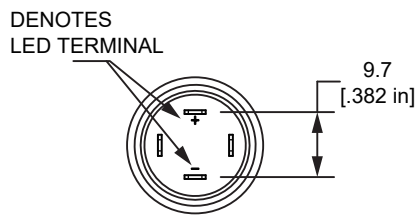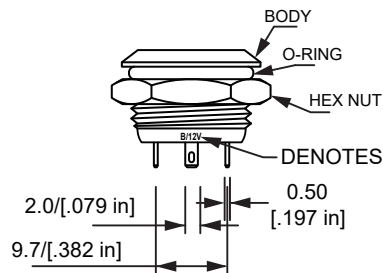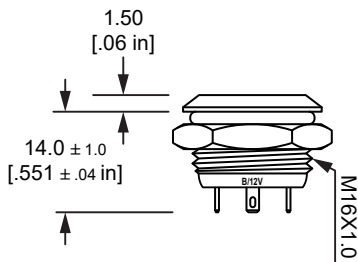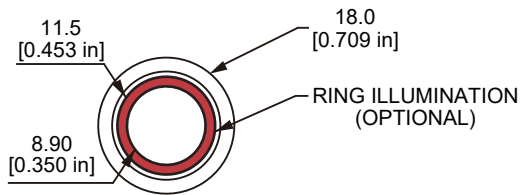




Ultra short anti vandal switch

Ø19mm

SOLDER TERMINAL



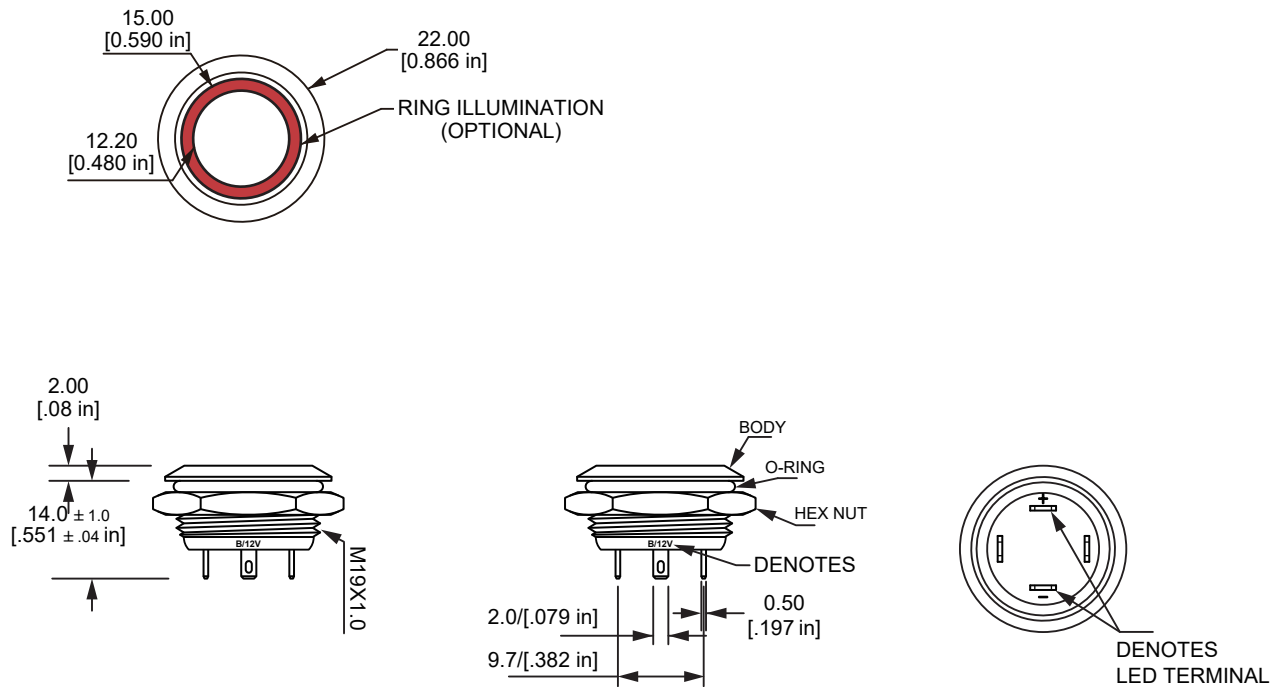


SCREW TERMINAL

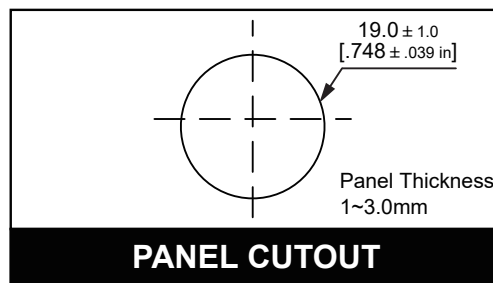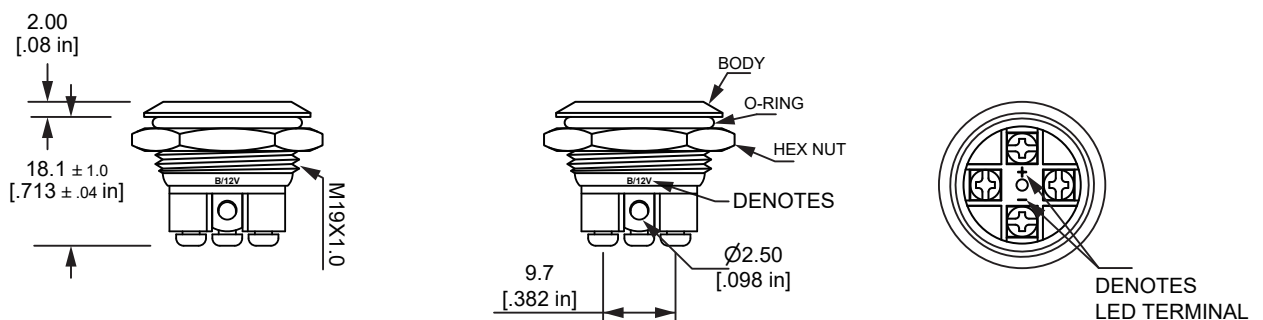

Ultra short anti vandal switch
Ø22mm

DIMENSIONS

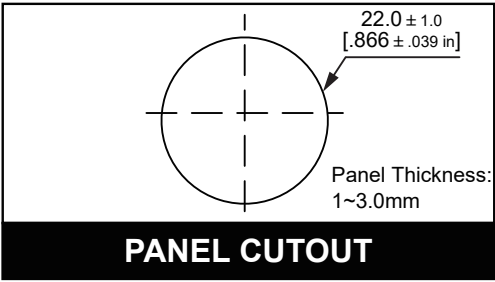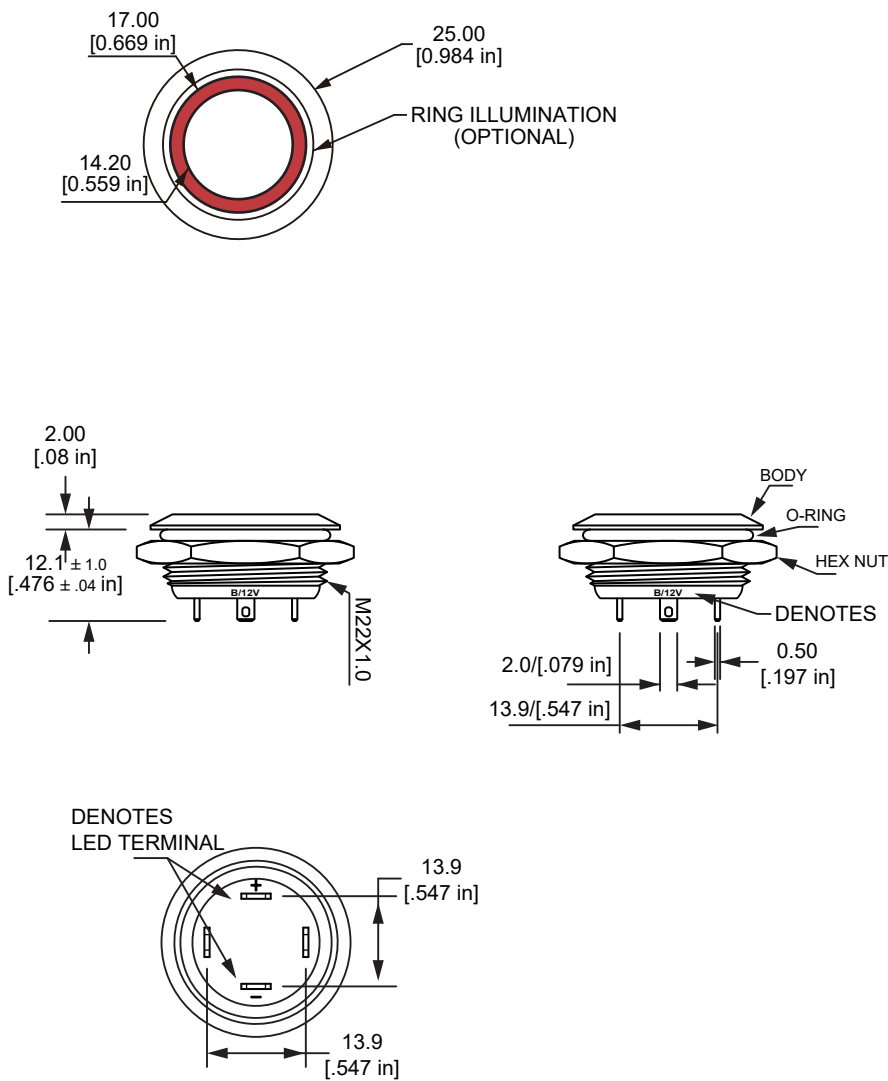

Ultra short anti vandal switch Ø25mm

DIMENSIONS

