




Anti Vandal Switch Ø 16mm

Order Code

Series	Actuator Options	Terminal Options	Function Options	Material Options	Graphic Options
☐ ☐	☐	☐	☐	☐ ☐	☐ ☐ ☐
V16	F-Flat H-High B-Domed	P-Solder lug (2.8X0.5) NONE-Screw	Momentary 1-NO 2-NC	S-Stainless steel N-Nickel plated brass A-Anodized aluminum G-Gold plated brass	NONE-Non-marking LE-Laser etched

Description

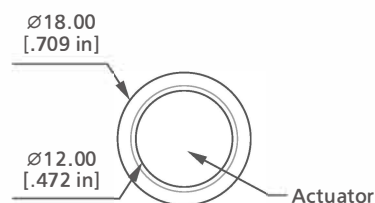


Panel thickness: 1~6mm


Technical Data

Type	V16-F	V16-B	V16-H
Actuator options	Flat	Domed	High
Terminal	Screw / Solder lug (2.8X0.5)		
Max. switch rating	2A 48VDC		
Contact resistance	≤ 50m Ω		
Insulation resistance	≥ 1000m Ω		
Dielectric strength	2000VAC		
Operation temp	-20°C ~ +55°C		
Mechanical life	1,000,000 cycles		
Electrical life	200,000 cycles		
Contact material	Silver alloy		
Torque	5~14Nm		
Operation pressure	Approx. 4N		
Protection	IP65 / IK08		
Material			
Actuator	Stainless steel / Gold or Nickel plated brass / Anodized aluminum		
Body	Stainless steel / Gold or Nickel plated brass / Anodized aluminum		
Base	PBT		


Actuator Options



Flat Actuator








High Actuator



Domed Actuator

Solder Terminal

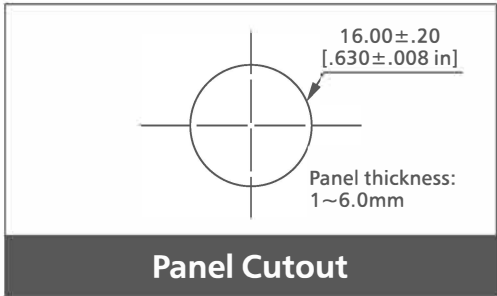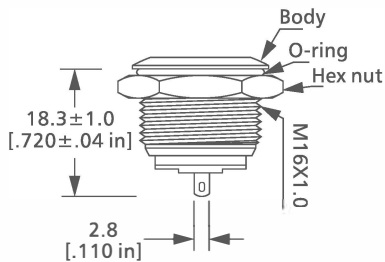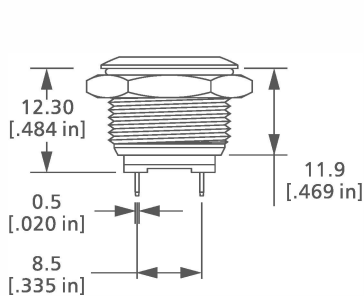

Screw Terminal

