



- Anti-Vandal IK09/ Sealed IP65
- Normal Open/ Normal Closed
- Domed/ Flat/ High Flat Front
- Stainless Steel/ Brass
- 1,000,000 cycles momentary



V19-H-1-S

V19-B-1-G

Order Code

Series

V19

Actuator Options

F - Flat
H - High
B - Domed

Terminal

P - Pin(2.8x0.5)
Screw no letter

Function

Momentary:
1- NO

Material Finish

G- *Gold
N- Nickel
C- Chrome
S- Polished
Stainless Steel
B- Brushed
Stainless Steel
A- *Anodized aluminum


Marking Options

Custom Markings Available


Function



Suggested Panel Cutout

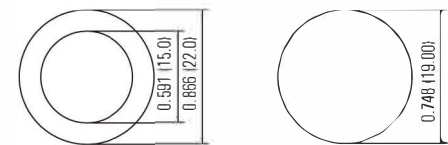

Max. Panel Thickness: 0.394 (10mm)

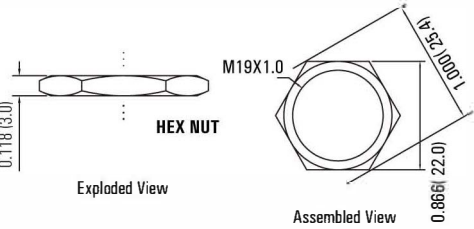


Technical Data

Type	V19-F	V19-B	V19-H
Actuator Options	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50m Ω		
Insulation Resistance	≥ 1000m Ω		
Dielectric Strength	2000VAC		
Operation Temp.	-20 ℃ ~ +55 ℃		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	5.5N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ *Gold plated Brass/ *Anodized Aluminum		
Body	Stainless Steel/ Nickel plated brass/ *Gold plated Brass/ *Anodized Aluminum		
Base	PBT		

*Material can be customized.

Dimension

Screw

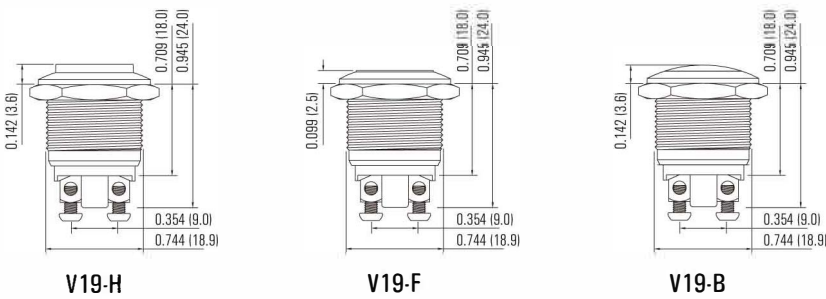

Solder

