

RoHS COMPLIANCE



- Anti-Vandal IK09/ Sealed IP65
- Normal Open/ Normal Closed
- Domed/ Flat/ High Flat Front
- Stainless Steel/ Brass
- 1,000,000 cycles momentary

Momentary: Means that when you push switch and then move your finger, the actuator will back to the original position.

Order Code

Series	Actuator Options	Terminal	Function	Material Finish	Marking Options
 Vs19	 F - Flat H - High B - Domed	 P: Pin(2.8x0.5) Screw no letter	 Momentary: 1- NO 2- NC	 G- *Gold N- Nickel C- Chrome S- Polished Stainless Steel B- Brushed Stainless Steel	 Custom Markings Available

Function




Technical Data

Type	Vs19-F	Vs19-B	Vs19-H
Actuator Options	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50m Ω		
Insulation Resistance	≥ 1000m Ω		
Dielectric Strength	2000VAC		
Operation Temp.	-20 ℃ ~ +55 ℃		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	5.5N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ Brass/ *Gold plated Brass		
Body	Stainless Steel/ Chrome, Nickel plated brass/ *Gold plated Brass		
Base	PBT		


*Material can be customized.

Suggested Panel Cutout

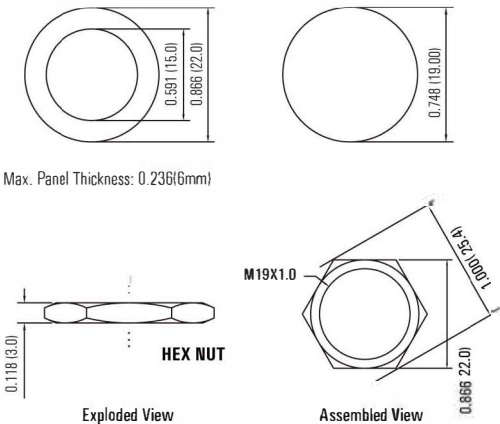

Dimension

Screw

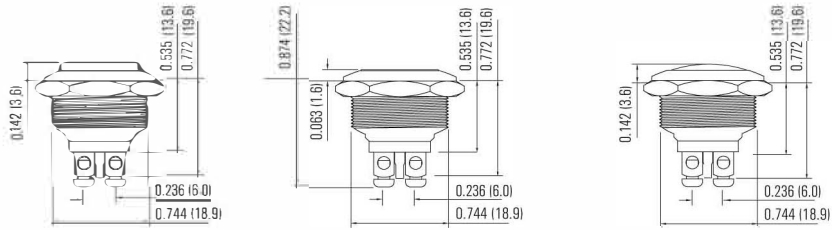

Solder

